
# LANWAY HAMERMILS

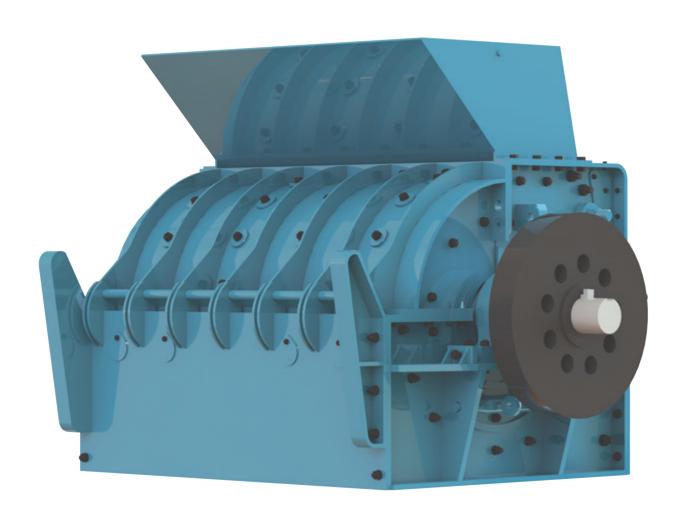


## **LANWAY HAMMERMILLS**

#### PROVEN PERFORMANCE AND RELIABILITY

By varying the size of the grid bars, adjusting the distance from the 'anvil block' to the hammer path and changing the rotational speeds of the rotor, the desired results can be achieved in one pass, be it fine ground agricultural limestone or 40mm Down (clause 804).

Our Hammermills are extremely robust, yet compact and efficient. The design is apparently simple and unfussy, yet it is deceptively subtle.

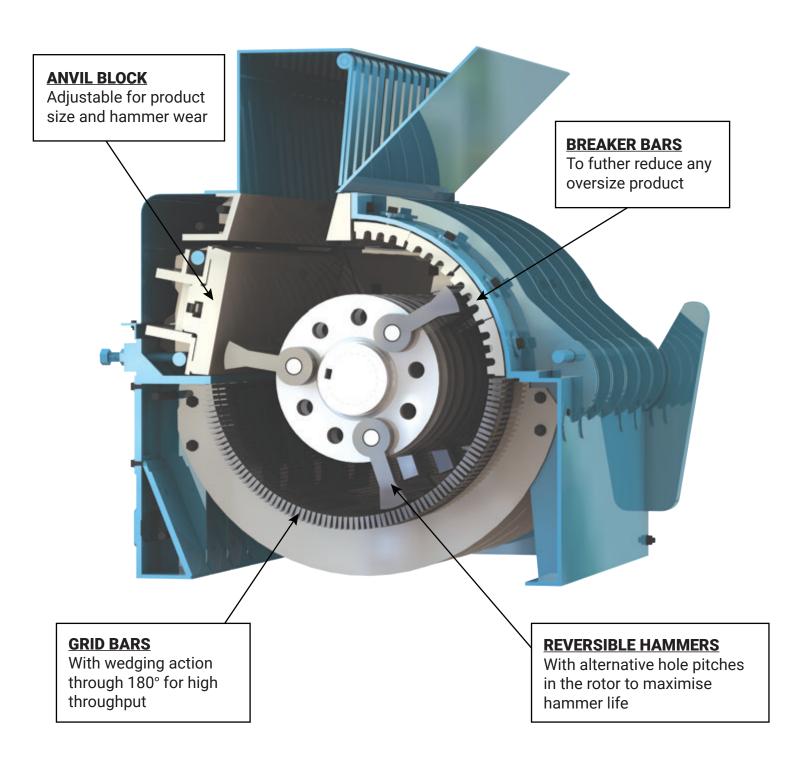

# **WEIGHTS & DIMENSIONS**


## **APPROXIMATE WEIGHTS & DIMENSIONS FOR ALL LANWAY MODELS**

Machine Number	2	3	4	5
Height with chute (mm)	1660	1660	1725	1759
Length at base	1346	1346	1353	1402
Width at base	978	1219	1721	1721
Weight (Kg)	4070	5500	7325	7500

## **CAPACITY CHART**

### THROUGHPUT OF MACHINE PRODUCING 40MM DOWN AND/OR AGRICULTURAL LIMESTONE

Throughput Guideline (Tonnes/Hour)	2	3	4	5
Agricultural Limestone	12/20	20/30	30/45	30/60
40mm Down (Clause 804)	50/100	150/200	180/250	200/300

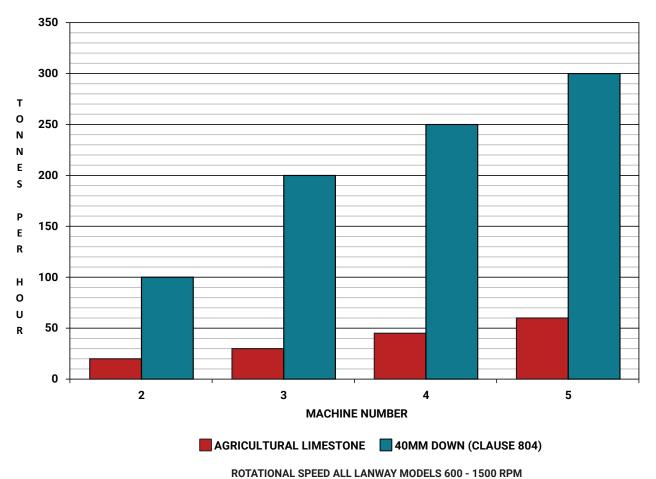

RS LTD | TEL: +44 (0) 1352 876630

E-MAIL: sales@lanwaycrushers.com WEB: www.lanwaycrushers.com



THIS BROCHURE IS TO ASSIST YOU IN SELECTING A LANWAY HAMMER-MILL FOR YOUR PROJECT AND WE WOULD WELCOME THE OPPURTUNITY TO DISCUSS YOUR INDIVIDUAL REQUIREMENTS.

OUR POLICY IS ONE OF CONTINUAL DEVELOPMENT. ALL INFORMATION CONTAINED WITHIN THIS BROCHURE IS SUBJECT TO CONFIRMATION AND WE RESERVE THE RIGHT TO AMEND SPECIFICATIONS OR ANY INFORMATION WITHOUT PRIOR NOTICE.

TEL: +44 (0) 1352 876630

E-MAIL: sales@lanwaycrushers.com

WEB: www.lanwaycrushers.com